

Confidea CHT

CHARGING TRAY Art. 71.98.0043



Description

The Confidea Charging Tray is a rack-mountable device of 3 U high that can recharge 6 Confidea Battery Packs at once.

It has an auto-ranging power supply and a loop- though mains connector.

Maximum 4 chargers can be daisy-chained for 110 VAC regions and 8 for 220 VAC regions.

It is designed for multiple mounting possibilities, having 19" rack, wall or table mounting capabilities.

Features


- Loop-through mains connector
- 6 slots for 1 Confidea Battery Pack each
- 19" rack mountable

Specifications

Technical Data	
Power Supply	110 - 230 VAC +/- 10%
Power consumption	200 W
Dimensions	483(w) x 132.1 (h) x 139.5(d)
Weight (g)	3750
Color	RAL9011
Part Number	71.98.0043

Leo Bekaertlaan 1 • 8870 Izegem • Belgium • Tel. +32 51 30 30 45 • Fax +32 51 31 06 70 E-mail: conference@televic.com • Web: http://www.televic-conference.com

Dimensions

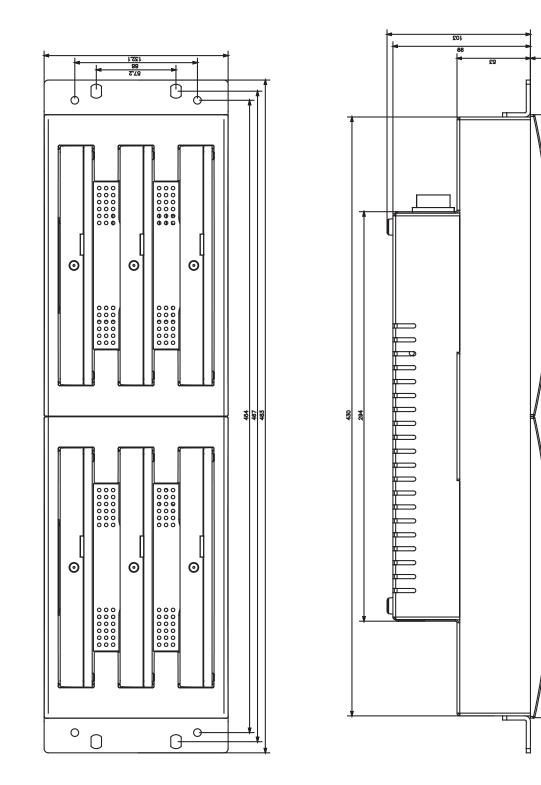

9.95

8